

GLASS GANTRY

Standard
- Double glazed glass, black screen-printing
- Heated front glass, upward opening

INTERIORS

Standard
- Polished s/s

EXTERIOR CLADDING

Standard
- HPL black / white / gray
Options
- HPL RAL



IT

Vetrina Gelato

Vetro frontale camera riscaldato inclinato a 15°, apertura servo-assistita verso l'alto, fianchi laterali in vetro camera con serigrafia estetica, cappellotto in vetro, profili a vista in alluminio brillante a specchio, vano operatore chiuso con scorrevoli in plexiglass, illuminazione a LED. Vasca coibentata con poliuretano ecologico e rivestita in acciaio inox, predisposizione per vaschette gelato da 5lt (360x165x120h) non fornite, indicatore gusti retroilluminato, refrigerazione a doppio flusso di circolazione forzata di aria, sbrinamento automatico ad inversione di ciclo. Quadro di comando digitale, piano in acciaio inox satinato, telaio portante in acciaio verniciato a polvere RAL9005.

EN

Gelato Showcase


Tempered front double glass inclined at 15°, upward opening, double glass sides with aesthetic screen-printing, glass top, visible profiles in polished mirror-finish aluminum, operator side closure with plexiglass panels, LED lighting system. Molded heat-insulated tank coated by AISI 304 s/s, prearrangement for of lt.5,2 s/s pans dim. mm.360x165x120h (not included), s/s flavour labels with back-lighting, fan ventilated refrigeration with double air flow system, automatic reverse defrost cycle. Digital control panel, brushed s/s working top, RAL9005 powder-coated steel supporting frame.


FR

Vitrine à Glace

Vitrage frontal en double verre chauffant incliné à 15°, ouverture assistée vers le haut, panneaux latéraux en double verre, avec sérigraphie esthétique, partie supérieure vitrée, montants visibles en aluminium poli à miroir, compartiment opérateur fermé avec portes coulissantes en plexiglass, éclairage à LED. Cuve isotherme en polyuréthane **écologique**, revêtue en acier inoxydable, prédisposition pour bacs à glace de 5 litres (360x165x120h mm) non fournis, indicateur de goûts avec rétro-éclairage **éclairage**, **défrigération** à circulation d'air forcée double flux. Dégivrage automatique à inversion de cycle, panneau de commande numérique, plan en acier inox satiné, châssis en acier thermolaqué RAL9005.

 -18°C



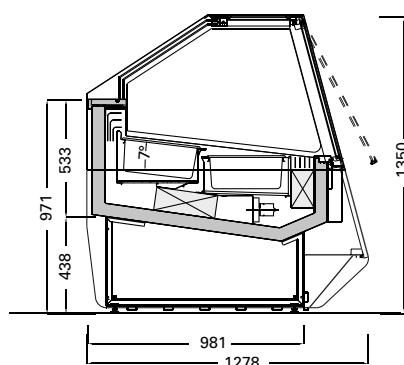

Technical



Ventilated	Automatic/reverse cycle
R290	N. 4 / H.R. 70% / 35 °C
Semi-Hermetic	230 V / 1 ph / 50 Hz
Led 3.000°K	-18°C

Data Sheet

	Code (+SKIN) Energy Label	Dimensions mm	Weight Kg	Max Pwr. Consumption W / A	Avg Operating Consumption KW/H	Cooling Power/Expansion W / °C	GAS Type
	MYA2GEL12I 	1190x1200x1350H 1370x1380x1640H	290 155	1800/4,3	1,0	800 / -35	R290
	MYA2GEL18I 	1690x1200x1350H 1870x1380x1640H	360 212	2700/7,2	1,3	1130 / -35	R290
	MYA2GEL24I 	2190x1200x1350H 2370x1380x1640H	460 268	3400/9,0	1,8	1440 / -35	R290
	MYA2GEL12+12I 	2190x1200x1350H 2370x1380x1640H	460 268	3500/15,0	1,9	800+800 / -35	R290
* compressor: semi-hermetic power supply: 400V / 3 ph / 50 Hz + N							
	MYA2GELAP45E 	R2544x1200x1350H 1510x1380x1640H	350 171	2600/7,0	1,3	1030 / -35	R452a

Options:

s/s trays for ice-cream cakes	stick ice-cream rack	perspex pan	s/s pan mm. 360x250x80H	s/s dipper well	roller night blind	converter device from -18° to +4°C	ciam connect	kit of casters

Certifications

ISO9001 Quality
ISO14001 Environmental
ISO45001 Safety
ISO50001 Energy

