

GLASS GANTRY

Standard
- Heated glass sides
- Float front glass
(with glass baffle)

Options
- Heated front
glass (no baffle)

INTERIORS

- Polished s/s

EXTERIOR CLADDING

Standard
- HPL black/white/gray

Options
- HPL RAL

IT

Vetrina Refrigerata Ventilata

Teca vetro con serraggio meccanico | fianchi laterali riscaldati | micro-plafoniera in alluminio brillante con illuminazione LED | scorrevoli in PETG easy sliding | deflettore frontale anti-condensa | vasca coibentata con poliuretano ecologico e rivestita in acciaio inox | refrigerazione ventilata con sistema a capillare (valvola termostatica per motore esterno) | centralina elettronica e lettore digitale della temperatura a filo piano | vassoi espositivi e pianetto perimetrale in acciaio lucido | piano di lavoro in acciaio lucido | telaio portante in acciaio zincato con piedini inox regolabili in altezza | vano tecnico e vano a giorno in acciaio inox lucido

EN

Ventilated Refrigerated Showcase

Glass structure with mechanical fastening | heated glass sides | bright aluminum LED light fixture | PETG easy sliding doors | front anti-fog air baffle | tank insulated with ecological polyurethane and covered with stainless steel | ventilated refrigeration with capillary system (thermostatic valve for external compressor) | electronic control unit and digital temperature reader flush with the surface | display trays and perimetric shelf in polished steel | worktop in polished steel | supporting frame in galvanized steel with height-adjustable stainless steel feet | technical compartment and open compartment in polished stainless steel

FR



Vitrine Réfrigérée Ventilée

Vitrage avec fermeture mécanique | côtés vitrés chauffants | micro-plafonnier en aluminium brillant avec éclairage LED | coulissants en PETG avec ouverture simple | déflecteur avant avec système anti-condensation | cuve isolée avec du polyuréthane écologique et revêtue en acier inoxydable | réfrigération ventilée avec système capillaire (vanne thermostatique pour groupe distant) | commande numérique et afficheur de température encastré dans le plan | plateaux d'exposition et plan périmétral en acier poli | plan de travail en acier poli | châssis en acier galvanisé avec pieds en acier inoxydable réglables en hauteur | compartiment technique et compartiment ouvert en acier inoxydable poli



+2°C / +8°C



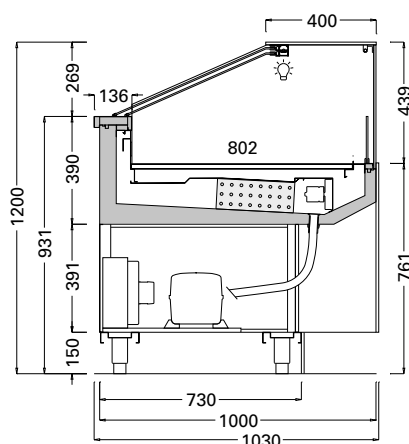

Technical



Ventilated	Automatic
R290 ECO Friendly / R455a	N. 4 / H.R. 55% 30 °C
Hermetic	230 V / 1 Ph / 50 Hz
LED no-spot 3000°K	+2°C / +8°C

Data Sheet (built-in compressor)

	Code (+SKIN) Energy Label	Dimensions mm	Weight Kg	Max Pwr. Consumption W / A	Avg Operating Consumption KW/h	Cooling Power/Expansion W / °C	GAS Type
	SQ10R412RV090I 	900x1030x1200H 1080x1210x1490H	105 100	710 / 3.8	0.45	600 / -10	R290
	SQ10R412RV100I 	1000x1030x1200H 1180x1210x1490H	105 105	710 / 3.8	0.45	600 / -10	R290
	SQ10R412RV130I 	1300x1030x1200H 1480x1210x1490H	130 135	850 / 4.5	0.5	800 / -10	R290
	SQ10R412RV150I 	1500x1030x1200H 1680x1210x1490H	130 155	850 / 4.5	0.5	800 / -10	R290
	SQ10R412RV170I 	1700x1030x1200H 1880x1210x1490H	160 175	1200 / 6.5	0.75	1200 / -10	R290
	SQ10R412RV200I 	2000x1030x1200H 2180x1210x1490H	180 200	1300 / 6.9	0.8	1350 / -10	R290
	SQ10R412RV210I 	2100x1030x1200H 2280x1210x1490H	180 210	1300 / 6.9	0.8	1350 / -10	R290
	SQ1R412RV AP90QI	1135*1135x1030x1200H 1320x1320x1490H	160 130	1200 / 6.5	0.75	1200 / -10	R455a
	SQ1TS12RV AP90FI* R1404	R1404x1030x1200H 1580x1210x1490H	140 140	1050 / 5.9	0.65	1000 / -10	R455a

* solo con optional Teca TS | Only with TS glass gantry | uniquement avec présentoirs vitrés TS

Options:

intermediate fix shelf	LED lighting for shelf	heated front	L-shaped doors	chocolate	lift-up	condensation water pan	kit of casters	ciam connect

Certifications

ISO9001 Quality
ISO14001 Environmental
ISO45001 Safety
ISO50001 Energy

