

GLASSES

Standard
- Heated glass sides
- Float front glass
(with glass baffle)

Options
- Heated front
glass (no baffle)

INTERIORS

- Polished s/s

EXTERIOR CLADDING

Standard
- HPL black/white/gray

Options
- HPL RAL



IT

Vetrina Refrigerata Macelleria

Teca vetro con serraggio meccanico | fianchi laterali riscaldati | micro-plafoniera in alluminio brillante con illuminazione LED | scorrevoli in PETG easy sliding | deflettore frontale anti-condensa | vasca coibentata con poliuretano ecologico e rivestita in acciaio inox | refrigerazione ventilata con valvola elettronica | centralina elettronica e lettore digitale della temperatura a filo piano | vassoi espositivi e pianetto perimetrale in acciaio lucido | piano di lavoro in acciaio lucido | telaio portante in acciaio zincato con piedini inox regolabili in altezza | vano tecnico e vano a giorno in acciaio inox lucido

EN

Meat Refrigerated Showcase

Glass structure with mechanical fastening | heated glass sides | bright aluminum LED light fixture | PETG easy sliding doors system | anti-fog air baffle | Tank insulated with ecological polyurethane and covered with stainless steel | ventilated refrigeration with electronic valve | electronic control unit and digital temperature reader flush with the surface | display trays and perimeter shelf in polished steel | worktop in polished steel | supporting frame in galvanized steel with height-adjustable stainless steel feet | technical compartment and open compartment in polished stainless steel

FR



Vitrine réfrigérée Boucherie

Vitrage avec fermeture mécanique | côtés vitrés chauffants | micro-plafonnier en aluminium brillant avec éclairage LED | coulissants en PETG avec ouverture simple | déflecteur avant avec système anti-condensation | cuve isolée avec du polyuréthane écologique et revêtue en acier inoxydable | réfrigération ventilée avec vanne thermostatique | commande numérique et afficheur de température encastré dans le plan | plateaux d'exposition et plan périmétral en acier poli | plan de travail en acier poli | châssis en acier galvanisé avec pieds en acier inoxydable réglables en hauteur | compartiment technique et compartiment ouvert en acier inoxydable poli



+2°C / +6°C



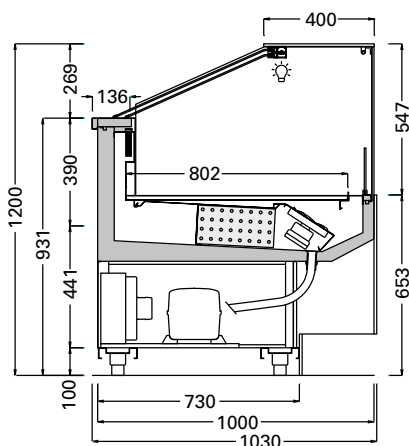

Technical



Ventilated	Automatic / electrical
R290 ECO Friendly (built-in)	R452A (ext)
Hermetic	230 V / 1 Ph / 50 Hz
LED no-spot 3000°K	+2°C

Data Sheet (built-in compressor)

	Code (+SKIN) Energy Label	Dimensions mm	Weight Kg	Max Pwr. Consumption W / A	Avg Operating Consumption KW/h	Cooling Power/Expansion W / °C	GAS Type
	SQ10R412M100I 	1000x1030x1200H 1180x1210x1490H	110 105	800 / 4.1	0.5	700 / -10	R290
	SQ10R412M150I 	1500x1030x1200H 1680x1210x1490H	140 155	950 / 5.2	0.6	900 / -10	R290
	SQ10R412M200I 	2000x1030x1200H 2180x1210x1490H	160 200	1250 / 6.9	0.8	1200 / -10	R290
	SQ10R412M260I 	2600x1030x1200H 2780x1210x1490H	200 250	1500 / 7.5	1.0	1500 / -10	R290
	SQ10R412M300I 	3000x1030x1200H 3180x1210x1490H	220 285	1700 / 8.5	1.1	1600 / -105	R290
	SQ1R412M AP90SQI	1500*1500x1030x1200H 1680x1680x1490H	180 210	1250 / 6.9	0.8	1200 / -10	R455a
	SQ1TS12M AP90SFI*	R1404x1030x1200H 1580x1210x1490H	150 160	1150 / 6.3	0.75	950 / -10	R455a

* solo con optional Teca TS | Only with TS glass gantry | uniquement avec présentoirs vitrés TS

Options:

