



IT

Vetrina Refrigerata Macelleria

Vetro frontale incernierato su profilo in alluminio brillante ed apribile verso il basso | fianchi laterali riscaldati | montanti in alluminio brillante | mensola intermedia in vetro | micro-plafoniere con illuminazione LED su ogni ripiano | cappellotto in vetro | scorrevoli in PETG easy sliding | deflettore frontale anti-condensa | vasca coibentata con poliuretano ecologico e rivestita in acciaio inox | refrigerazione ventilata con valvola elettronica | centralina elettronica e lettore digitale della temperatura a filo piano | vassoi espositivi e pianetto perimetrale in acciaio lucido | piano di lavoro in acciaio lucido | telaio portante in acciaio zincato con piedini inox regolabili in altezza | vano tecnico e vano a giorno in acciaio inox lucido

EN

Meat Refrigerated Showcase

Front glass hinged on silver aluminum profiles with downward opening | heated glass sides | bright aluminum side profiles | intermediate glass shelf | LED light fixture on each tier | glass top | PETG easy sliding doors system | anti-fog air baffle | tank insulated with ecological polyurethane and covered with stainless steel | ventilated refrigeration with electronic valve | electronic control unit and digital temperature reader flush with the surface | display trays and perimetric shelf in polished steel | worktop in polished steel | supporting frame in galvanized steel with height-adjustable stainless steel feet | technical compartment and open compartment in polished stainless steel

FR


Vitrine réfrigérée Boucherie

Vitre avant avec charnières sur un profilé en aluminium brillant et ouvrable vers le bas | côtés vitrés chauffants | montants en aluminium brillant | étagère intermédiaire en verre | micro-plafonnier avec éclairage LED sur chaque étagère | partie supérieure vitrée | coulissants en PETG avec ouverture simple | déflecteur avant avec système anti-condensation | cuve isolée avec du polyuréthane écologique et revêtue en acier inoxydable | réfrigération ventilée avec vanne thermostatique | commande numérique et afficheur de température encastré dans le plan | plateaux d'exposition et plan périmétral en acier poli | plan de travail en acier poli | châssis en acier galvanisé avec pieds en acier inoxydable réglables en hauteur | compartiment technique et compartiment ouvert en acier inoxydable poli



+2°C / +6°C



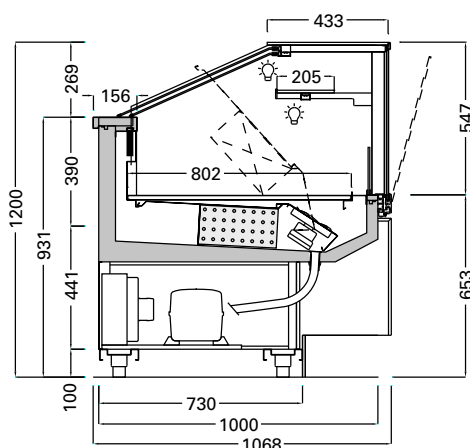

Technical



- Ventilated
- R290 ECO Friendly (built-in)
- R452A (ext)
- Hermetic
- LED no-spot 3000°K
- Automatic / electrical
- N. 4 / H.R. 55% 30 °C (86 °F)
- 230 V / 1 Ph / 50 Hz
- +2°C

Data Sheet (built-in compressor)

	Code (+SKIN) Energy Label	Dimensions mm	Weight Kg	Max Pwr. Consumption W / A	Avg Operating Consumption KW/h	Cooling Power/Expansion W / °C	GAS Type
	SQ10S212M100I 	1000x1068x1200H 1180x1248x1490H	110 110	800 / 4.1	0.5	700 / -10	R290
	SQ10S212M150I 	1500x1068x1200H 1680x1248x1490H	140 160	950 / 5.2	0.6	900 / -10	R290
	SQ10S212M200I 	2000x1068x1200H 2180x1248x1490H	160 205	1250 / 6.9	0.8	1200 / -10	R290
	SQ10S212M260I 	2600x1068x1200H 2780x1248x1490H	200 260	1500 / 7.5	1.0	1500 / -10	R290
	SQ10S212M300I 	3000x1068x1200H 3180x1248x1490H	220 296	1700 / 8.5	1.1	1600 / -105	R290
	SQ1S212M AP90SQI	1500*1500x1068x1200H 1680x1680x1490H	180 210	1250 / 6.9	0.8	1200 / -10	R455a
	SQ1S212M AP90SFI	R1404x1068x1200H 1580x1248x1490H	150 150	1150 / 6.3	0.75	950 / -10	R455a

* solo con optional Teca TS | Only with TS glass gantry | uniquement avec présentoirs vitrés TS

Options:

