



IT

Vetrina Refrigerata Ventilata

Innovativo sistema di alzata vetri brevettato | fianchi laterali riscaldati | cappello lato operatore scorrevole con arresto soft closing e ribaltina ad aggancio magnetico cappello lato cliente apribile verso l'alto | micro-plafoniere LED frontale e laterali | profili in alluminio brillante | vasca coibentata con poliuretano ecologico e rivestita in acciaio inox | refrigerazione ventilata con sistema a capillare (valvola termostatica per motore esterno) | centralina elettronica e lettore digitale della temperatura a filo piano | vassoi espositivi e pianetto perimetrale in acciaio lucido | piano di lavoro in acciaio lucido | telaio portante in acciaio zincato con piedini inox regolabili in altezza | vano tecnico e vano a giorno in acciaio inox lucido

EN

Ventilated Refrigerated Showcase

Innovative patented glass opening system | heated glass sides | sliding glass top on operator side with soft closing system and folding glass opening with magnetic clamps | glass top on customer side with upward opening | front and side LED light fixture | bright aluminum profiles | tank insulated with ecological polyurethane and covered with stainless steel | ventilated refrigeration with capillary system (thermostatic valve for external compressor) | electronic control unit and digital temperature reader flush with the surface | display trays and perimetric shelf in polished steel | worktop in polished steel | supporting frame in galvanized steel with height-adjustable stainless steel feet | technical compartment and open compartment in polished stainless steel

FR


Vitrine Réfrigérée Ventilée

Système innovant et breveté d'ouverture du vitrage | côtés vitrés chauffants | partie supérieure coulissante à côté opérateur avec système de fermeture douce et tablette vitrée avec fixation magnétique | côté client et ouverture vers le haut | micro-plafonniers avec éclairage LED sur l'avant et sur les côtés | profils aluminium brillant | cuve isolée avec du polyuréthane écologique et revêtue en acier inoxydable | réfrigération ventilée avec système capillaire (vanne thermostatique pour groupe distant) | commande numérique et afficheur de température encastré dans le plan | plateaux d'exposition et plan périmétral en acier poli | plan de travail en acier poli | châssis en acier galvanisé avec pieds en acier inoxydable réglables en hauteur | compartiment technique et compartiment ouvert en acier inoxydable poli



 +2°C / +8°C



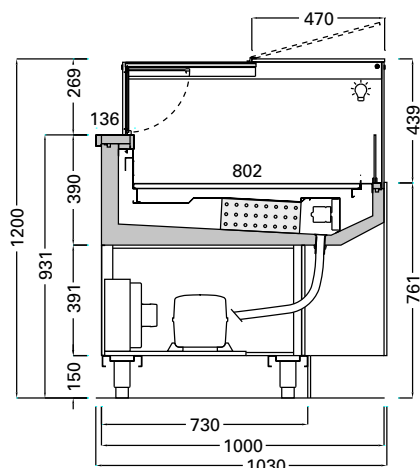

Technical



Ventilated



Automatic



R290 ECO
Friendly



N. 4 / H.R. 55%
30 °C (86 °F)



Hermetic



230 V / 1 Ph / 50 Hz



LED no-spot 3000°K



+2°C / +8°C

Data Sheet (built-in compressor)

	Code (+SKIN) Energy Label	Dimensions mm	Weight Kg	Max Pwr. Consumption W / A	Avg Operating Consumption KW/h	Cooling Power/Expansion W / °C	GAS Type
	SQ10G1RV090I 	900x1030x1200H 1080x1210x1490H	105 100	710 / 3.8	0.45	600 / -10	R290
	SQ10G1RV100I 	1000x1030x1200H 1180x1210x1490H	105 105	710 / 3.8	0.45	600 / -10	R290
	SQ10G1RV130I 	1300x1030x1200H 1480x1210x1490H	130 135	850 / 4.5	0.5	800 / -10	R290
	SQ10G1RV150I 	1500x1030x1200H 1680x1210x1490H	130 155	850 / 4.5	0.5	800 / -10	R290
	SQ10G1RV170I 	1700x1030x1200H 1880x1210x1490H	160 175	1200 / 6.5	0.75	1200 / -10	R290
	SQ10G1RV200I 	2000x1030x1200H 2180x1210x1490H	180 200	1300 / 6.9	0.8	1350 / -10	R290
	SQ10G1RV210I 	2100x1030x1200H 2280x1210x1490H	180 210	1300 / 6.9	0.8	1350 / -10	R290

Options:

