



IT

Vetrina Refrigerata Macelleria

Innovativo sistema di alzata vetri brevettato | fianchi laterali riscaldati | cappello lato operatore scorrevole con arresto soft closing e ribaltina ad aggancio magnetico cappello lato cliente apribile verso l'alto | micro-plafoniere LED frontale e laterali | profili in alluminio brillante | vasca coibentata con poliuretano ecologico e rivestita in acciaio inox | refrigerazione ventilata con valvola elettronica | centralina elettronica e lettore digitale della temperatura a filo piano | vassoi espositivi e pianetto perimetrale in acciaio lucido | piano di lavoro in acciaio lucido | telaio portante in acciaio zincato con piedini inox regolabili in altezza | vano tecnico e vano a giorno in acciaio inox lucido

EN

Meat Refrigerated Showcase

Innovative patented glass opening system | heated glass sides | sliding glass top on operator side with soft closing system and folding glass opening with magnetic clamps | glass top on customer side with upward opening | front and side LED light fixture | bright aluminum profiles | tank insulated with ecological polyurethane and covered with stainless steel | ventilated refrigeration with electronic valve | electronic control unit and digital temperature reader flush with the surface | display trays and perimetric shelf in polished steel | worktop in polished steel | supporting frame in galvanized steel with height-adjustable stainless steel feet | technical compartment and open compartment in polished stainless steel

FR


Vitrine réfrigérée Boucherie

Système innovant et breveté d'ouverture du vitrage | côtés vitrés chauffants | partie supérieure coulissante à côté opérateur avec système de fermeture douce et tablette vitrée avec fixation magnétique | côté client et ouverture vers le haut | micro-plafonniers avec éclairage LED sur l'avant et sur les côtés | profils aluminium brillant | cuve isolée avec du polyuréthane écologique et revêtue en acier inoxydable | réfrigération ventilée avec vanne thermostatique | commande numérique et afficheur de température encastré dans le plan | plateaux d'exposition et plan périmétral en acier poli | plan de travail en acier poli | châssis en acier galvanisé avec pieds en acier inoxydable réglables en hauteur | compartiment technique et compartiment ouvert en acier inoxydable poli



+2°C / +6°C



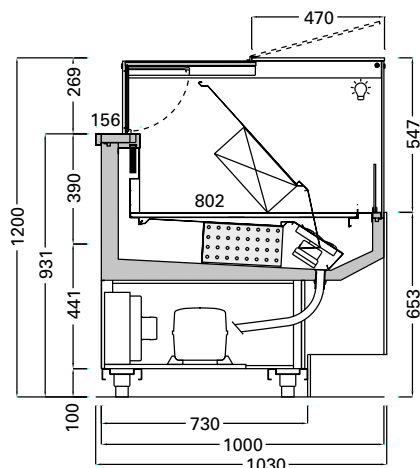

Technical



Ventilated	Automatic / electrical
R290	N. 4 / H.R. 55%
Hermetic	230 V / 1 Ph / 50 Hz
LED no-spot 3000°K	+2°C

Data Sheet (built-in compressor)

	Code (+SKIN) Energy Label	Dimensions mm	Weight Kg	Max Pwr. Consumption W / A	Avg Operating Consumption KW/h	Cooling Power/Expansion W / °C	GAS Type
	SQ10G1M100I 	1000x1030x1200H 1180x1210x1490H	110 110	800 / 4.1	0.5	700 / -10	R290
	SQ10G1M150I 	1500x1030x1200H 1680x1210x1490H	140 160	950 / 5.2	0.6	900 / -10	R290
	SQ10G1M200I 	2000x1030x1200H 2180x1210x1490H	160 205	1250 / 6.9	0.8	1200 / -10	R290
	SQ10G1M260I 	2600x1030x1200H 2780x1210x1490H	200 260	1500 / 7.5	1.0	1500 / -10	R290
	SQ10G1M300I 	3000x1030x1200H 3180x1210x1490H	220 296	1700 / 8.5	1.1	1600 / -105	R290

Options:

intermediate fix shelf	LED lighting for shelf	heated front	L-shaped doors	s/s plate for scale	paper holder	condensation water pan	kit wheels	whide system

Certifications

ISO9001 Quality
ISO14001 Environmental
ISO45001 Safety
ISO50001 Energy

