

COMPACT H750 Ventilated-Hot Counters

CIAM



IT

Basamenti caldi ventilati H750

Modulo cella monolitico realizzato completamente in acciaio inox AISI 304 | bordi interni raggiati | coibentazione con poliuretano ecologico a base d'acqua | tappo coibentato | rastrelliera in filo di acciaio inox per vasche e griglie gastronorm da 1/1 | sportelli in acciaio inox lucido con micro cerniere e guarnizioni a chiusura magnetica | vano tecnico da 100 mm | riscaldamento ventilato con resistenze elettriche | centralina elettronica touch | zoccolatura in acciaio inox con piedini regolabili in altezza

EN

Ventilated-Hot Counters H750

Monolithic AISI 304 stainless steel module | rounded internal edges | insulation with ecological water-based polyurethane | insulated cap | stainless steel wire rack for 1/1 gastronorm trays and grids | polished stainless steel doors with micro hinges and gaskets with magnetic closure | 100 mm frame support | ventilated heating with electric resistances | electronic touch control unit | stainless steel plinth with height-adjustable feet

FR


Comptoirs Chauds Ventilés H750

Module cellule monolithique en acier inoxydable AISI 304 | bordes internes arrondies | isolation en polyuréthane écologique à base d'eau | bouchon isolé | râtelier en fil d'acier inoxydable pour bacs et grilles gastronorm de 1/1 | portes en acier inoxydable poli avec micro-charnières et joints à fermeture magnétique | profilé à rainures en aluminium poli | compartiment technique de 100 mm | système de chauffage ventilé avec résistances électriques | unité de contrôle électronique tactile | plinthe en acier inox avec pieds réglables en hauteur



 +30/+80 °C



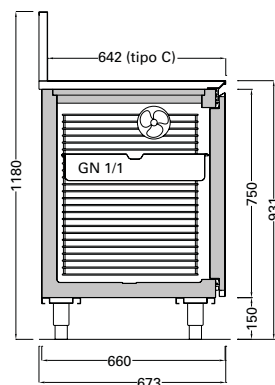

Technical



Ventilated / Electrical	-
-	N.4 / U.R. 55%
-	230V / 1ph / 50Hz
-	+30/+80 °C

Data Sheet

	Code (+SKIN)	Dimensions	Weight	Max Pwr. Consumption	Avg Operating Consumption	Cooling Power/Expansion	GAS
	Energy Label	mm	Kg	W / A	KW/H	W / °C	Type
	CBBCVTF1P6H7	650x673x1180H 830x853x1470H	36 55	410/1,9	0,21	-	-
	CBBCVTF2P6H7	1000x673x1180H 1180x853x1470H	53 75	910/4,1	0,46	-	-
	CBBCVTF3P6H7	1450x673x1180H 1630x853x1470H	74 105	1400/6,3	0,71	-	-
	CBBCVTF4P6H7	1900x673x1180H 2080x853x1470H	92 135	1910/8,5	0,96	-	-

Options:

compact glass door	double drawers 1/2-1/2	double drawers 1/3-2/3	triple drawers	double size drawers	CG double drawers 1/2-1/2	CG double size double drawers	condensation water pan	kit of casters

Certifications

ISO9001 Quality
ISO14001 Environmental
ISO45001 Safety
ISO50001 Energy

