

MUROZERO SLIDE

CIAM

EXTERIOR CLADDING

Standard
- unfinished to be
integrated into the wall
decoration

INTERIORS

Standard
- Mirror

Options
- grés
- custom RAL color
- aged mirror

DOORS

Standard
- ZERO frame and
handle in polished finish
- mirror screen-printing

Options
- custom RAL screen-
printing
- frame handle in RAL
epoxy powder-coated
finish on request

SHELVES

Standard
- glass

Options
- wine shelves



IT

Temperatura Positiva

Murale refrigerato raso-muro a temperatura positiva (+2/+16°C) | vasca monolitica coibentata con poliuretano ecologico e rivestita in acciaio inox | impianto a parete con refrigerazione a circolazione forzata d'aria su tutti i livelli espositivi | sbrinamenti automatici programmati | unità condensatrice ermetica remota | centralina touch integrata nel cielino superiore | sistema automatico di apertura e chiusura delle ante scorrevoli complanari con azionamento touchless integrato nelle porte | vassoio di fondo in vetro specchiato | interni con pannelli di vetro specchiato ad aggancio su cremagliera | mensole in vetro regolabili in altezza | illuminazione indiretta incorporata sul telaio porte con strip led no-spot 3000°K | basamento in tubolare di acciaio con piedini regolabili in altezza

EN

Positive Temperature

Refrigerated flush-wall cabinet at positive temperature (+2/+16°C) | molded heat-insulated tank made of ecological polyurethane coated with s/s | wall-mounted system with fan ventilated refrigeration on all display levels | programmed automatic defrosting | remote hermetic condensing unit | touch control panel integrated in the ceiling | automatic coplanar sliding door opening and closing system with touchless control, integrated into the doors | bottom tray in mirrored glass | interior panels made of mirrored glass hooked on a rack | glass shelves adjustable on racks | indirect lighting incorporated on the door frame with 3000°K diffused LED | tubular steel base with height-adjustable feet

FR


Température Positive

Armoire murale réfrigérée à température positive (+2/+16°C) | cuve monolithique isolée avec du polyuréthane écologique et revêtue en acier inoxydable | évaporateur au mur avec réfrigération à circulation d'air forcé sur tous les niveaux d'exposition | dégivrages automatiques programmés | unité de condensation hermétique à distance | unité de contrôle tactile intégrée dans le plafond supérieur | système d'ouverture et de fermeture automatique des portes coulissantes coplanaires avec commande sans contact intégrée dans les portes | panneau de fond en verre miroir | intérieurs avec des panneaux en verre miroir montés sur crémaillère | étagères en verre réglables | éclairage indirect incorporé sur le cadre de porte avec bandeaux LED diffusant 3000°K | base en acier tubulaire avec pieds réglables en hauteur



+2/+16°C



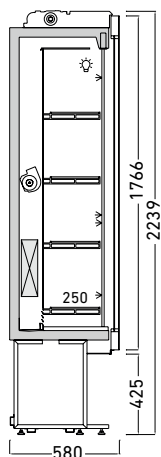


Technical



ventilated	automatic / electric
R452	N.4 / 30°C / U.R. 55%
1 / hermetic	230 V / 1 Ph / 50 Hz
3000°K	+2/+16°C

Data Sheet



Code (+SKIN) Energy Label	Dimensions mm	Weight Kg	Max Pwr. Consumption W / A	Avg Operating Consumption KW/H	Cooling Power/Expansion W / °C	GAS Type
MURZSLDPVT29E	2906x580x2239H	490	2800/14,9	1,9	3000/-36	R452
E	3086x760x2529H	119				

Optionals:

shelf T6	grès custom cladding	RAL custom cladding	key lock	ciam connect	praline	switch from -18°C to +4°C	dimmer control LED lighting
----------	----------------------	---------------------	----------	--------------	---------	---------------------------	-----------------------------

Certifications

ISO9001 Quality
ISO14001 Environmental
ISO45001 Safety
ISO50001 Energy

