

SERIE 9000/750

HORIZONTAL SHOWCASES



CIAM

Refrigeration solutions
with a design focus.



Channeled modular snack showcase



Fresh pastry



Cold deli products



Sandwich



Packed meat



Cheese and dairy products



Cured meats



Chocolate



Bread



Hot deli products



Ice-cream



Frozen pastry



Brioche



Fruits and vegetables



Salad



Pizza



Milk



Drinks

Serie 900/750


The 900-750 series consists of modular refrigerated, warm and ambient display cabinets available in 6 lengths, 3 corner models, 2 depths (900 and 750) and 10 types of glass gantries. Serie900-750 is characterized by a lowered display compartment in order to have a large loading capacity. The timeless style of these showcases allows designers to easily insert them into any design and stylistic context.



Watch the
videos

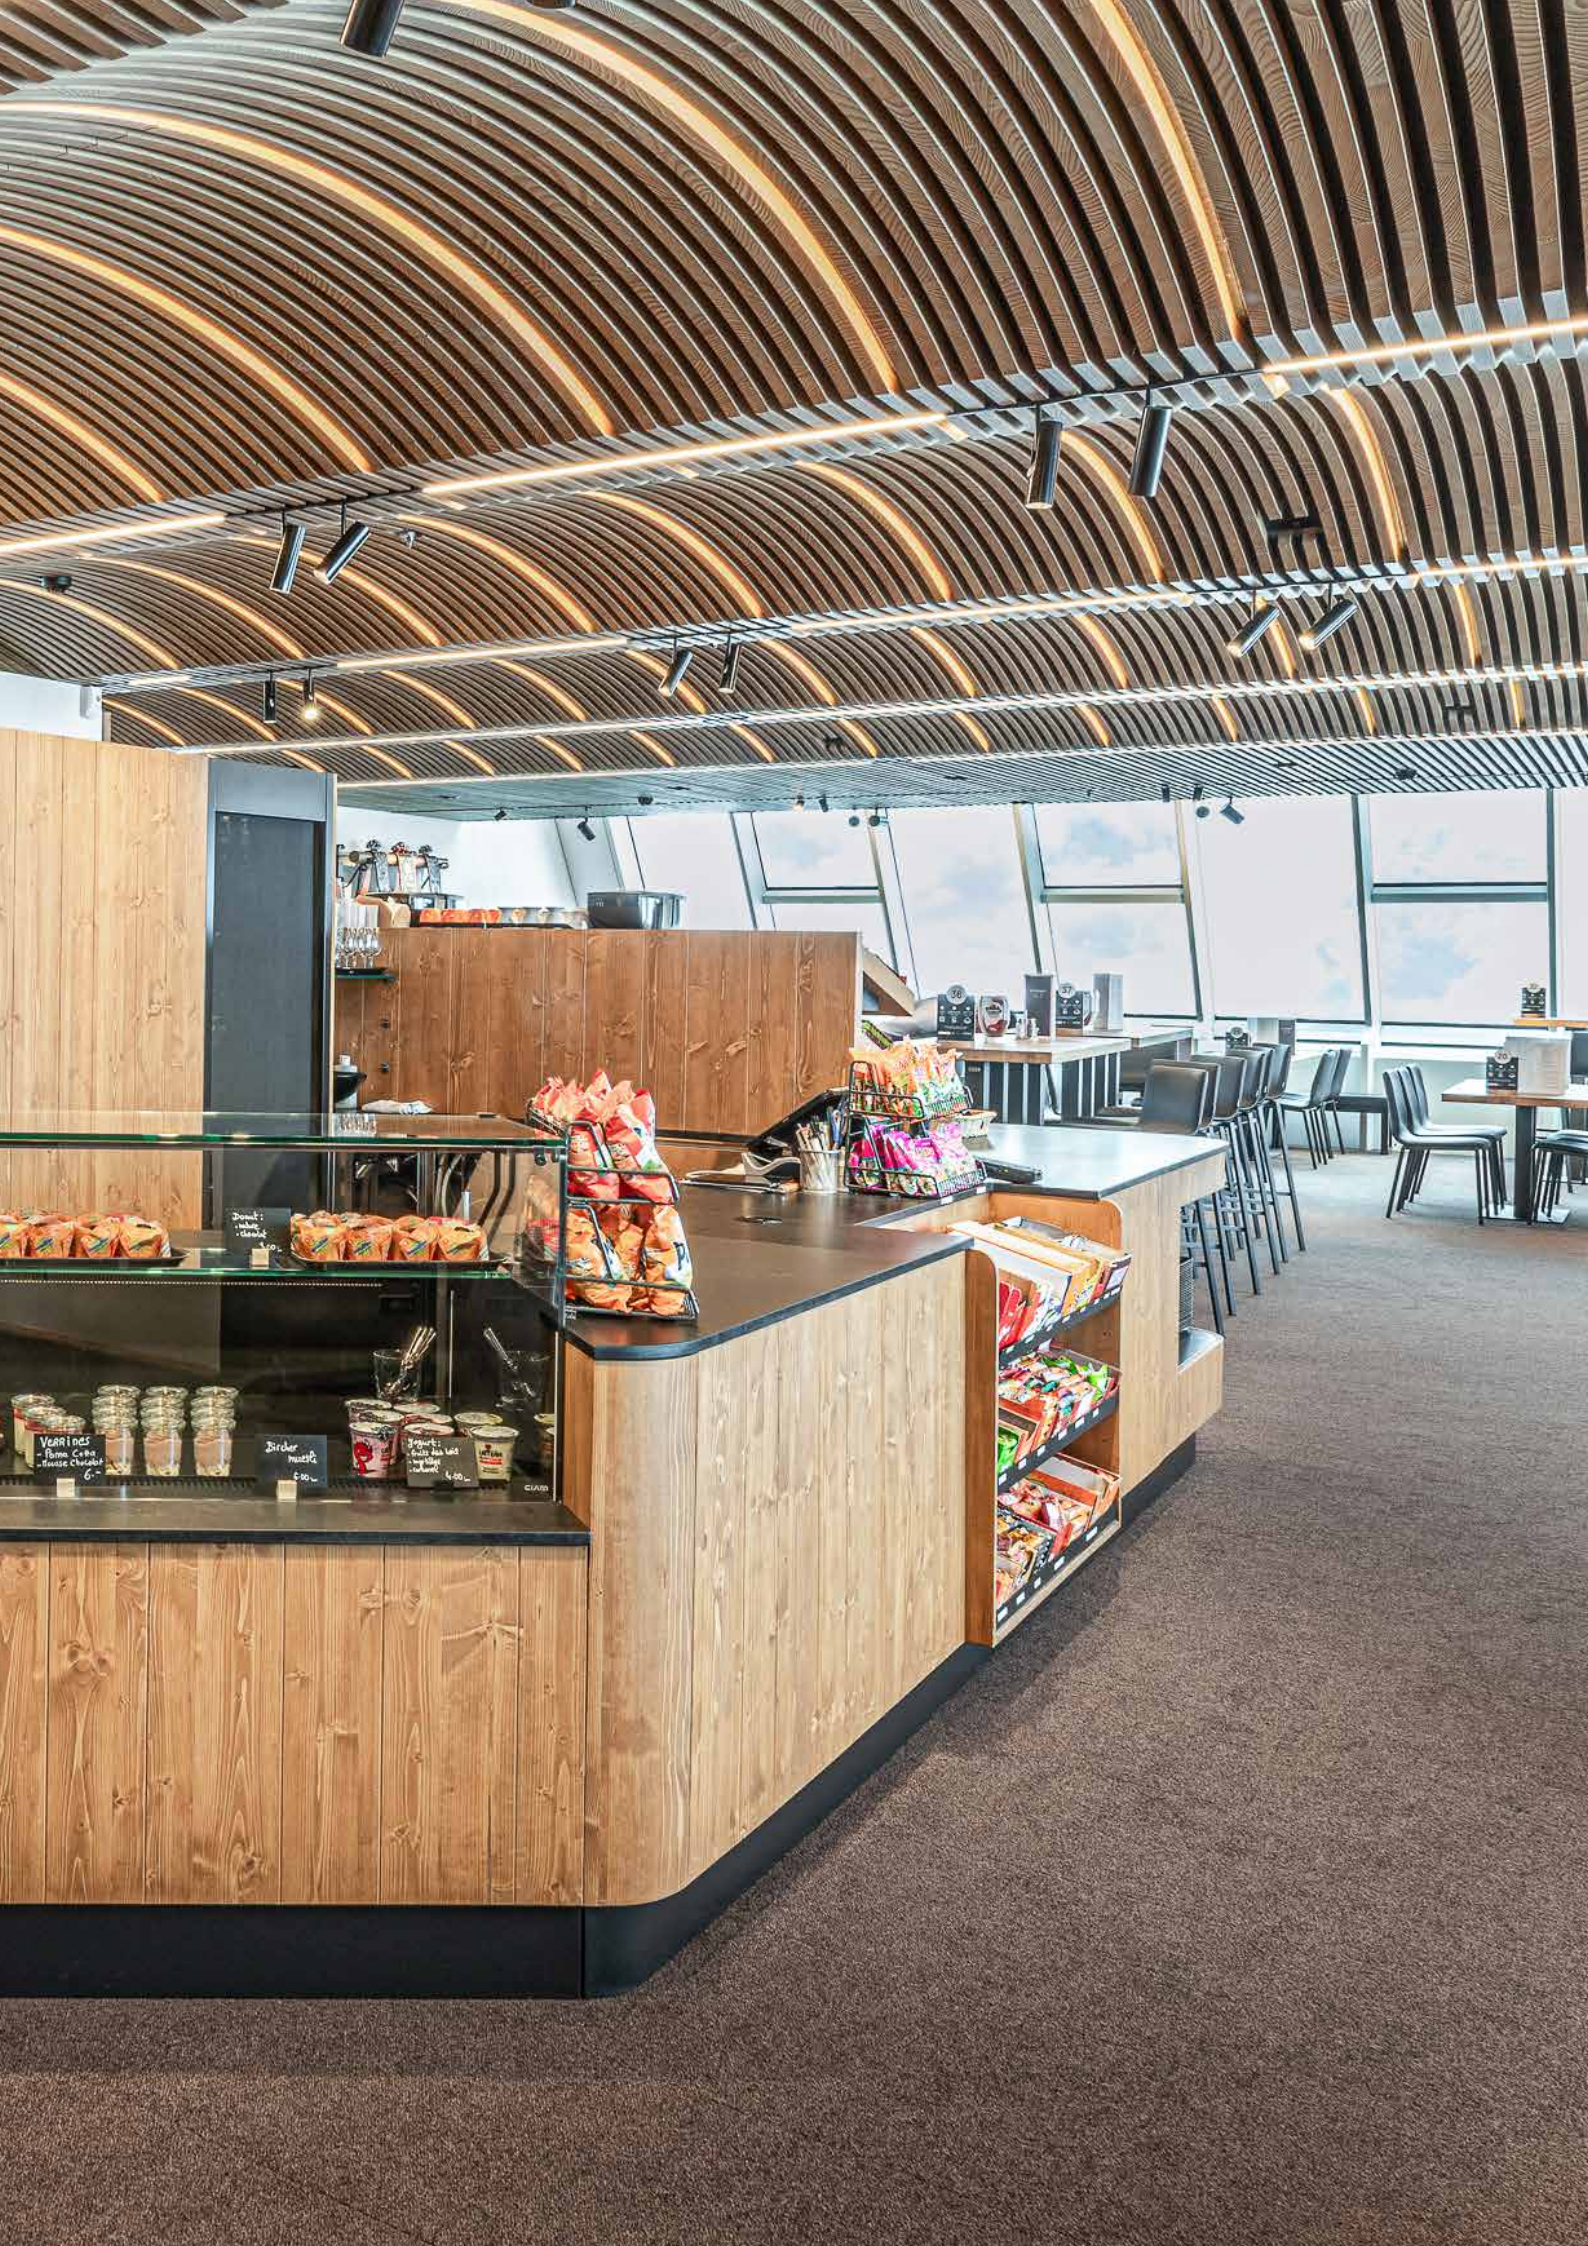Versatility and
timeless style





Refrigeration



Ventilated refrigeration

Cold application and frozen application modules.





Static refrigeration

Refrigeration in cold and frozen application display cases

Serie900 showcases can have positive temperature (+4°) or low temperature (-18°) for ice-cream and semifreddo.

Humidity control (Opt.)

Upon request it is possible to have humidity control, especially for chocolate display.

Evaporator with cataphoretic treatment

All condensing units are cataphoresis-treated and guarantee maximum hygiene, as the copper pipes and aluminum fins have no rough surfaces.

Ecological gas R290

The positive-temperature refrigerated modules are equipped with a built-in condensing unit using eco-friendly gas R290.

Refrigerated storage module (Opt.)

Upon request, it is possible to provide an additional refrigerated module.

Automatic electric defrosting (Opt.)

Upon request, the positive temperature refrigerated display cabinets can be equipped with electric defrosting, which speeds up defrosting times and prevents ice formation in the evaporator.

Heated pan for evaporation of condensation water (Opt.)

The showcases can be equipped with a condensate evaporator pan with electric resistances, if it is not possible to connect the water drainage system to the room drainage system.

Reverse-cycle defrosting

All low-temperature models have ultra-rapid reverse cycle defrosting as standard.



Ecological gas R290



Low-temperature showcases with reverse cycle defrosting

Heated showcases



Humid heat with induction (Opt.)

Bain-marie warm and dry-warm modules





Dry-warm showcases

Perforated trays (Opt.)

Upon request, the bain-marie warm showcases can be equipped with perforated steel trays, instead of GN trays.

Heated shelf (Opt.)

On request, the Serie900-750 display case can be equipped with an heated shelf in laminated glass.

Heating lamp (Opt.)

On request, Serie900-750 heated showcases can be equipped with a infrared halogen heating lamp.

Dry-warm showcases

Dry-warm showcases have a steel plate heated by electric resistances.

Bain-marie warm showcases

Bain-marie warm showcases have an internal tank with rounded internal edges and designed to house GN trays.

Humid heat with induction (Opt.)

On request, the dry-warm cabinets can be equipped with a water pan loaded manually for the natural addition of humidification.



Bain-marie warm showcases



Bain-marie modules are designed to house GN trays or perforated plates



Granato - Naples

Design

Materials

All visible components can be customized by using Ciam's selection of Materials, which includes a wide variety of gres, acrylics, engineered stones, natural stones, epoxy powder-coated sheets, sheets with electroplating treatment, brass, and wood.

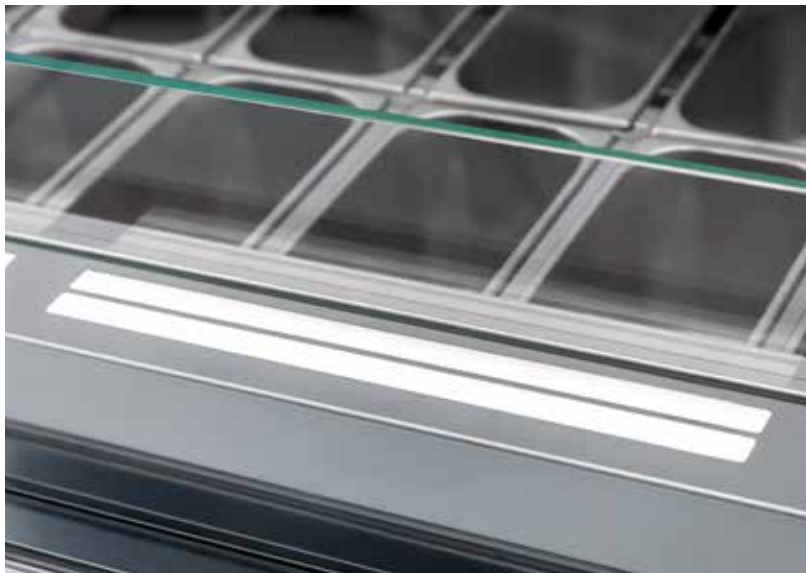






Channeling showcases

Monolithic tanks



HPL paneling kit





Kit of casters

Channeling showcases

The 900-750 Series showcases are designed to be channeled in continuity. This feature is also available between showcases with different uses and temperatures.

Monolithic tanks

The monolithic tanks are insulated with water-based ecological polyurethane.

Large exhibition space

Serie900-750 is characterized by a lowered display compartment, in order to have a large loading capacity.

Paneling kit

Upon request, the showcases can be equipped with a front and side paneling in solid or lacquered HPL.

Kit of casters



Types of set-up

Serie 900-750 showcases can be supplied in the following set-ups:

Paneled

A solid or painted HPL paneling is supplied upon request along with the display case.

Semi-finished set-up

In this set-up the display case is supplied without any paneling, which will be provided by the designer.

Drop-In

In order to be integrated in an existing counter, the Serie 900-750 showcases can also be supplied in a drop-in set-up.

Paneled set-up





Drop-in set-up

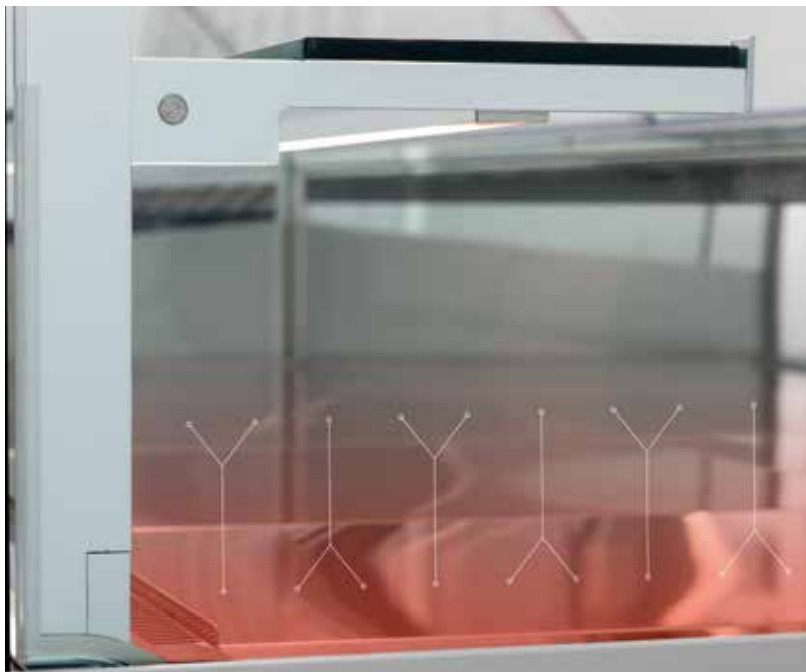


Semi-finished set-up

Glass gantries

The wide range of Series 900/750 display cabinets allows for the combination of 10 types of glass gantries, available in various heights.





Heated glass sides

Glass air baffle

In the standard version refrigerated showcases are equipped with glass air baffle.

Mirror finish for sides (Opt.)

Upon request, sides can be mirrored through a painting process.

Hardware and profiles in coordinated style and polished finish



Heated Glass Sides (std)

Refrigerated showcases are equipped with heated glass sides. Heated front glass on request (opt).

NoFog for ice-cream showcases (std)

The perfect transparency and lightness of a showcase is the basis of a quality display: this is why CIAM has patented an innovative anti-fog system that involves the use of 8mm-thick pyrolytic glass with low-voltage electrical resistances. In this way, the effect of a classic glass showcase is achieved even while using an heated glass.



Glass air baffle

Hardware and profiles

The profiles and hardware of the entire series have been designed with a unique and minimalist style. Most of them are made of stainless steel with micro-cast molds with a glossy (std) or powder-coated finish upon request (opt).



Micro-ceiling light

Chrome-plated shelf supports



Shelves

Glass shelves are fixed on two chrome-plated shelf supports.

Ceiling light

The ceiling light has 3000°K diffused LED strips.

Shelf with built-in lighting (Opt.)



Sliding doors

**Shelf with built-in lighting (Opt.)**

Upon request, shelves can be supplied with built-in light fixture.

Sliding doors

Access to the refrigerated compartment is via PETG sliding doors with perimeter gaskets.



TS

h1200 mm

UV glued glass | heated glass sides | bright aluminum LED light fixture | fixed glass shelf | PETG easy sliding doors system | anti-fog air baffle.

h1350 mm

UV glued glass | heated glass sides | bright aluminum LED light fixture | N°2 fixed glass shelves | PETG easy sliding doors system | anti-fog air baffle.



Detail of the UV glued glass gantry

R4

h1200 mm

Glass structure with mechanical fastening | heated glass sides | bright aluminum LED light fixture | fixed glass shelf | PETG easy sliding doors system | anti-fog air baffle.

h1350 mm

Glass structure with mechanical fastening | heated glass sides | bright aluminum LED light fixture | N°2 fixed glass shelves | PETG easy sliding doors system | anti-fog air baffle.



Fixed glass gantry with mechanical fastening





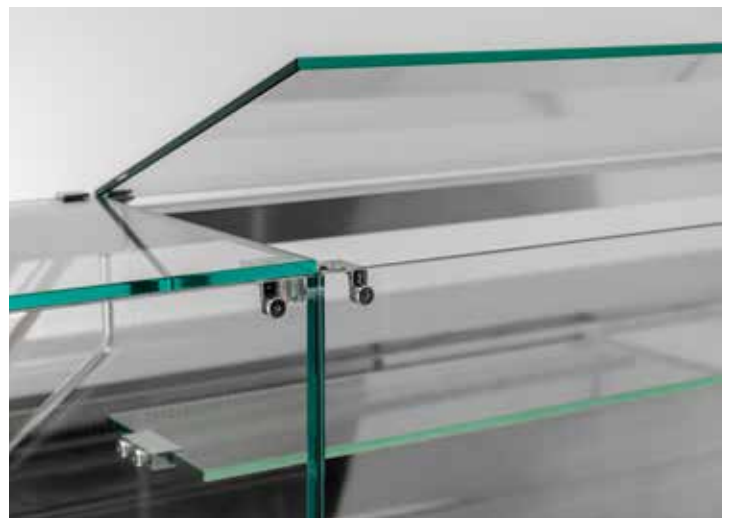
R4UP

h1200 mm

Upper glass structure screwed front glass on aluminum blocks | heated glass sides | the top glass can be lifted up | upper glass structure, thickness 10mm | LED lighting canopy in brilliant aluminum | fixed glass shelf | plexiglass sliding doors.

h1350 mm

Upper glass structure screwed front glass on aluminum blocks | heated glass sides | the top glass can be lifted up | upper glass structure, thickness 10mm | LED lighting canopy in brilliant aluminum | N°2 fixed glass shelves | plexiglass sliding doors.



The top glass can be lifted up

TSB

h1200 mm

UV glued glass downward opening hinged on bright aluminum profile | side glasses with anti-fog treatment | bright aluminum LED light fixture | fixed glass shelf | PETG easy sliding doors system | anti-fog front air baffle.



Front glass with downward opening





S2

h1200 mm

Front glass hinged on silver aluminum profiles with downward opening | heated glass sides | bright aluminum side profiles | intermediate glass shelf | LED light fixture on each tier | glass top | PETG easy sliding doors system | anti-fog air baffle.

h1350 mm

Front glass hinged on silver aluminum profiles with downward opening | heated glass sides | bright aluminum side profiles | n.2 intermediate glass shelves | LED light fixture on each tier | glass top | PETG easy sliding doors system | anti-fog air baffle.

Bright aluminum side profiles



C3

h1320 mm

Curved, tempered front glass with lift-down opening and hinged on "silver" anodized aluminium profiles | tempered side glasses with warm serigraphy | N°2 fixed glass shelves | plexiglass sliding doors | aluminum LED light fixture.



Curved, tempered front glass with lift-down opening





Ciam Connect System

Electronics

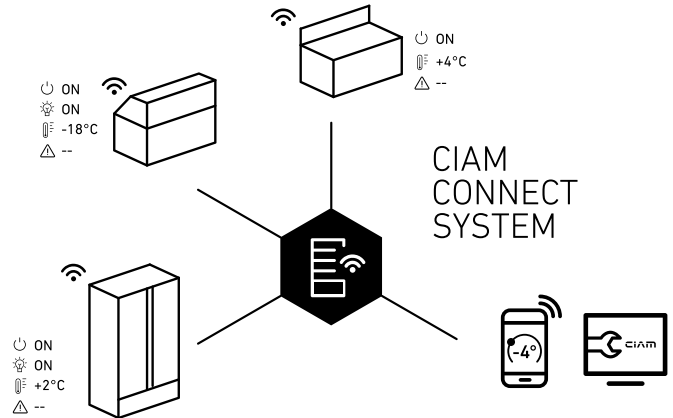


CIAM CONNECT

Ciam Connect is the integrated solution for remotely monitoring and managing all functions of CIAM products.

All features can be activated and monitored from a simple smartphone, tablet, or PC.

It is also possible to integrate the solution directly into your company's management system.



Connectivity

This SIM data communication device allows remote control of the showcase without having to connect it to Wi-Fi or the local internet network.



Remote control

Through the Cloud portal you can interact with the showcase, by downloading the operating graphics, monitoring alarms and product performance directly online.



Refrigeration with low consumption electronic fans



Digital control panel

Touch Panel

The elegant touch control panel is supplied as standard on all models.

Low consumption electronic fans


Ventilated refrigerated showcases are equipped with low consumption electronic fans.



Key features

1. Customization of panels, finishes and internal materials.
2. Customization of dimensions on specific requests.
3. Possibility to have two or more showcases joined together with the same aesthetics.
4. Eco-friendly gas R290 for built-in condensing units.
5. Wide range: 6 lengths, 3 corner models, 2 depths (900 and 750) and 10 types of glass gantries.
6. High humidity that enhances the perfect product preservation.
7. Adjustable shelves in height and depth on low voltage electrified rack. In this way it is possible to customize the display of the showcase without electric cables.
8. Sliding doors with hermetic perimeter seals on operator side that guarantee a hermetic closing of the refrigerated compartment.
9. ETL certification available for all the models (Canadian and north American markets).


Optional




Additional glass shelf



Compatibility with tube/white (patented system) for constant sanitation of internal surfaces




Anti-fog system for glasses (patented system)




Magnetic filter for an easy cleaning of the condenser



Remote control system for the constant monitoring of the showcase proper functioning




Showcases at positive temperature can be converted to be used for pralines.



Showcases at low temperature can be converted into positive temperature



Wheels kit



Possibility to add a storage module

TS H1200



TS H1350



Serie 900

R4 H1200



R4 H1350



R4UP H1200



R4UP H1350



TSB H1200



S2 H1200



S2 H1350



C3 H1320



TSB H1200



TS H1200



TS H1350



Serie 750

R4 H1200



R4 H1350



R4UP H1200

























R4UP H1350




	TS H1200	TS H1350	R4 H1200	R4 H1350	R4 UP H1200
GLASSES OPENING	UV glued glasses	UV glued glasses	Glasses with mechanical fastening	Glasses with mechanical fastening	Upward-opening top glass with micro-hinges
FRONT GLASS	UV glued glass with glass air baffle	UV glued glass with glass air baffle	Glass gantry with glass air baffle	Glass gantry with glass air baffle	Glass gantry with glass air baffle
SIDE GLASSES	Heated glass	Heated glass	Heated glass	Heated glass	Heated glass
N. SHELVES	1 fixed shelf	2 fixed shelves	1 fixed shelf	2 fixed shelves	1 fixed shelf
OPERATOR SIDE OPENING	PETG sliding doors with perimeter gaskets	PETG sliding doors with perimeter gaskets	PETG sliding doors with perimeter gaskets	PETG sliding doors with perimeter gaskets	PETG sliding doors with perimeter gaskets
STRIP-LED DIFFUSED LIGHTING	3000° K (Std) 2700° K (Opt) 4000° K (Opt)	3000° K (Std) 2700° K (Opt) 4000° K (Opt)	3000° K (Std) 2700° K (Opt) 4000° K (Opt)	3000° K (Std) 2700° K (Opt) 4000° K (Opt)	3000° K (Std) 2700° K (Opt) 4000° K (Opt)
PROFILES FINISHES	Polished aluminum (Std) RAL powder-coated (Opt) Electroplated (Opt)	Polished aluminum (Std) RAL powder-coated (Opt) Electroplated (Opt)	Polished aluminum (Std) RAL powder-coated (Opt) Electroplated (Opt)	Polished aluminum (Std) RAL powder-coated (Opt) Electroplated (Opt)	Polished aluminum (Std) RAL powder-coated (Opt) Electroplated (Opt)
HARDWARE FINISHES	Chrome-plated (Std) RAL (Opt)	Chrome-plated (Std) RAL (Opt)	Chrome-plated (Std) RAL (Opt)	Chrome-plated (Std) RAL (Opt)	Chrome-plated (Std) RAL (Opt)
LINEAR MODELS	●	●	●	●	●
AP90° SQ MODEL	●	●	●	●	-
AP90° SF MODEL	●	●	●	●	-

R4 UP H1350	TSB	S2 H1200	S2 H1350	C3
Upward-opening top glass with micro-hinges	Downward-opening glass gantry	Downward-opening front glass	Downward-opening front glass	Curved downward-opening front glass
Glass gantry with glass air baffle	UV glued glass with glass air baffle	Glass air baffle	Glass air baffle	Glass air baffle
Heated glass	Heated glass	Heated glass	Heated glass	Heated glass
2 fixed shelves	1 fixed shelf	1 fixed shelf	2 fixed shelves	2 fixed shelves
PETG sliding doors with perimeter gaskets	PETG sliding doors with perimeter gaskets	PETG sliding doors with perimeter gaskets	PETG sliding doors with perimeter gaskets	PETG sliding doors with perimeter gaskets
3000° K (Std) 2700° K (Opt) 4000° K (Opt)	3000° K (Std) 2700° K (Opt) 4000° K (Opt)	3000° K (Std) 2700° K (Opt) 4000° K (Opt)	3000° K (Std) 2700° K (Opt) 4000° K (Opt)	3000° K (Std) 2700° K (Opt) 4000° K (Opt)
Polished aluminum (Std) RAL powder-coated (Opt) Electroplated (Opt)	Polished aluminum (Std) RAL powder-coated (Opt) Electroplated (Opt)	Polished aluminum (Std) RAL powder-coated (Opt) Electroplated (Opt)	Polished aluminum (Std) RAL powder-coated (Opt) Electroplated (Opt)	Polished aluminum (Std) RAL powder-coated (Opt) Electroplated (Opt)
Chrome-plated (Std) RAL (Opt)	Chrome-plated (Std) RAL (Opt)	Chrome-plated (Std) RAL (Opt)	Chrome-plated (Std) RAL (Opt)	Chrome-plated (Std) RAL (Opt)
•	•	•	•	•
-	-	•	•	-
-	-	•	•	•

The ice cream display cases have a heated front glass with a no-fog system as standard.

	ENERGETICAL CLASS	TEMPERATURE	P 750	P 900	CORNER AP90° SQ SX	CORNER AP90° SQ DX	CORNER AP90° SF
STATIC REFRIGERATED		+4° C					
VENTILATED REFRIGERATED		+4° C					
STATIC REFRIGERATED WITH DRAWERS		+4° C	-		-	-	-
ICE-CREAM		-18° C	-		-	-	-
DRY-WARM Humid heat with induction kit	-	+80° C			-	-	-
BAIN-MARIE WARM	-	+80° C			-	-	-
BREAD	-	Ambient temperature	-		-	-	-
AMBIENT	-	Ambient temperature					

GAS	L1000	L1250	L1500	L2000	L2500	L3000	WORKTOP	DISPLAY AREA
Linear R290							Polished s/s (Std)	Polished s/s (Std)
Corner R455A R452A	•	•	•	•	•	•	Polished s/s Acrylic HPL Gres Stone Marble (Opt)	Polished s/s Powder coated s/s Acrylic HPL Gres Stone Marble (Opt)
Linear R290	•	•	•	•	•	•	Polished s/s (Std)	Polished s/s (Std)
Corner R455A R452A	•	•	•	•	•	•	Polished s/s Acrylic HPL Gres Stone Marble (Opt)	Polished s/s Powder coated s/s Acrylic HPL Gres Stone Marble (Opt)
R455A R452A	•	-	•	•	-	-	Polished s/s (Std) Polished s/s Acrylic HPL Gres Stone Marble (Opt)	Polished s/s (Std)
R455A R452A	• 	-	• 	• 	-	-	Polished s/s (Std) Polished s/s Acrylic HPL Gres Stone Marble (Opt)	Polished s/s (Std)
-	•	-	•	•	-	-	Polished s/s (Std) Polished s/s Acrylic HPL Gres Stone Marble (Opt)	Polished s/s (Std)
-	3x GN 1/1 	-	4x GN 1/1 	(3+3) x GN 1/1 			Polished s/s (Std) Polished s/s Acrylic HPL Gres Stone Marble (Opt)	Arrangement GN trays (Std) GN trays kit (Opt) Polished steel perforated trays (Opt)
-	•	•	•	•	-	-	Polished s/s (Std) Polished s/s Acrylic HPL Gres Stone Marble (Opt)	Drawer in solid wood staves (Std)
-	•	•	•	•	•	•	Polished s/s (Std) Polished s/s Acrylic HPL Gres Stone Marble (Opt)	Polished s/s (Std)





CIAM