



IT

Vetrina Refrigerata Ventilata

Innovativo sistema di alzata vetri brevettato | fianchi laterali riscaldati | cappello lato operatore scorrevole con arresto soft closing e ribaltina ad aggancio magnetico cappello lato cliente apribile verso l'alto | micro-plafoniere LED frontale e laterali | profili in alluminio brillante | vasca coibentata con poliuretano ecologico e rivestita in acciaio inox | refrigerazione ventilata con sistema a capillare (valvola termostatica per motore esterno) | centralina elettronica e lettore digitale della temperatura a filo piano | vassoi espositivi e pianetto perimetrale in acciaio lucido | piano di lavoro in acciaio lucido | telaio portante in acciaio zincato con piedini inox regolabili in altezza | vano tecnico e vano a giorno in acciaio inox lucido

EN

Ventilated Refrigerated Showcase

Innovative patented glass structure | heated glass sides | sliding glass top on operator side with soft closing system and folding glass opening with magnetic clamps | glass top on customer side with upward opening | front and side LED light fixture | bright aluminum profiles | tank insulated with ecological polyurethane and covered with stainless steel | ventilated refrigeration with capillary system (thermostatic valve for external compressor) | electronic control unit and digital temperature reader flush with the surface | display trays and perimetric shelf in polished steel | worktop in polished steel | supporting frame in galvanized steel with height-adjustable stainless steel feet | technical compartment and open compartment in polished stainless steel


FR

Vitrine Réfrigérée Ventilée

Système innovant et breveté d'ouverture du vitrage | côtés vitrés chauffants | partie supérieure coulissante à côté opérateur avec système de fermeture douce et tablette vitrée avec fixation magnétique | côté client et ouverture vers le haut | micro-plafonniers avec éclairage LED sur l'avant et sur les côtés | profils aluminium brillant | cuve isolée avec du polyuréthane écologique et revêtue en acier inoxydable | réfrigération ventilée avec système capillaire (vanne thermostatique pour groupe distant) | commande numérique et afficheur de température encastré dans le plan | plateaux d'exposition et plan périmétral en acier poli | plan de travail en acier poli | châssis en acier galvanisé avec pieds en acier inoxydable réglables en hauteur | compartiment technique et compartiment ouvert en acier inoxydable poli

+4°C / +6°C



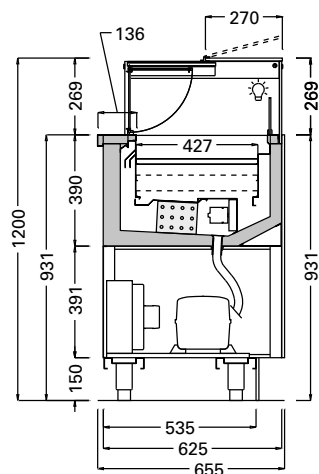

Technical



Ventilated



Automatic



R290 ECO
Friendly



N. 4 / H.R. 55%
30 °C (86 °F)



Hermetic



230 V / 1 Ph / 50 Hz



LED no-spot 3000°K



+4 / +6°C

Data Sheet (built-in compressor)

	Code (+SKIN) Energy Label	Dimensions mm	Weight Kg	Max Pwr. Consumption W / A	Avg Operating Consumption KW/h	Cooling Power/Expansion W / °C	GAS Type
	F63G1RV090I 	900x655x1200H 1080x835x1490H	95 65	460 / 3.0	0.25	290 / -10	R290
	F63G1RV100I 	1000x655x1200H 1180x835x1490H	95 75	460 / 3.0	0.25	290 / -10	R290
	F63G1RV130I 	1300x655x1200H 1480x835x1490H	130 90	575 / 3.5	0.35	420 / -10	R290
	F63G1RV150I 	1500x655x1200H 1680x835x1490H	130 105	575 / 3.5	0.35	420 / -10	R290
	F63G1RV170I 	1700x655x1200H 1880x835x1490H	160 115	620 / 4.0	0.35	515 / -10	R290
	F63G1RV200I 	2000x655x1200H 2180x835x1490H	170 135	730 / 4.2	0.4	545 / -10	R290
	F63G1RV210I 	2100x655x1200H 2280x835x1490H	170 145	730 / 4.2	0.4	545 / -10	R290

Options:

intermediate fix shelf	LED lighting for shelf	heated front	L-shaped doors	chocolate	lift-up	condensation water pan	kit of casters	whide system